

# Ion Power

## LITHion™ Dispersion

### LITHion™

#### Description

LITHion™ is a neutral dispersion containing lithiated Nafion polymer in an Isopropyl Alcohol solvent. The dispersion can be used to cast films, coat other materials, or mixed with other solutions.

#### Physical Properties

Density: 0.842 g/mL


Viscosity: 20.0 cp

EW of Nafion® polymer in dispersion: 1100

Component	Wt % in Solution
Lithiated Nafion®	10 – 12 %
Water	<1
1-Propanol	<1
2-Propanol	85-95
Methanol	<1
Mixed Ethers and other VOCs	<1

#### Product Labeling and Storage

A self-adhesive product label is on the sealed glass bottle containing the LITHion™ Dispersion. The label indicates the product name, quantity, lot number and purchase order number. Store the solution at room temperature; agitate mildly before dispensing.

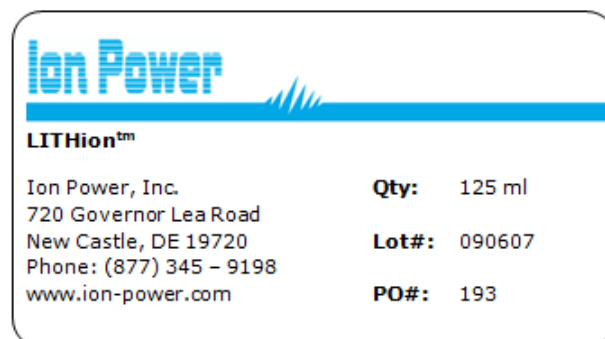

---

**For information about product offerings from Ion Power, contact:**

**World-wide Headquarters**

Ion Power, Inc.  
720 Governor Lea Road  
New Castle, DE 19720, U.S.A.

Telephone: 302-832-9550  
Fax: 302-832-9551  
Email: sales@ion-power.com  
Internet: www.ion-power.com  
www.nafionstore.com

**EUROPE**

Ion Power, GmbH  
Terminalstraße Mitte 18  
85356 München, Germany

Telephone: +49 (0) 89 / 97 00 71 70  
Fax: +49 (0) 89 / 97 00 72 00  
Email: sales@ion-power.com  
Internet: www.ion-power.de  
www.nafionstore.de